

# Class gG/gL IEC industrial ferrule fuses

**C08G, C08M, C10G, C10M, C14G, C14M, C22G, C22M**

## Specifications

**Class:** gG/gL and aM

**Description:** IEC ferrule fuses are available in physical sizes and amp ratings for system voltages of 250, 380, 400, 500 & 690Vac.

**Construction:** Ceramic with silver-plated copper endcaps

**Ratings:** See Catalog Number tables.

## Features and Benefits

- All fuses are available with an operated visible fuse indicator.
- Sizes 14x51 & 22x58 available with a built-in striker for micro-switch operation and remote indication.

## Typical Applications

- Class gG/gL and aM fuses are intended for industrial applications.

8 X 31



Catalog Number Without Indicator	Catalog Number With Indicator	Amp Rating	Watts Loss (W)	Voltage (AC)	Interrupting Rating (kA)
C08G0.5	C08G0.5I	0.5	2.60	400	20
C08G1	C08G1I	1	2.50		
C08G2	C08G2I	2	0.70		
C08G4	C08G4I	4	0.85		
C08G6	C08G6I	6	0.95		
C08G8	C08G8I	8	1.55		
C08G10	C08G10I	10	1.65		
C08G12	C08G12I	12	2.00		
C08G16	C08G16I	16	2.30		
C08G20	C08G20I	20	2.55		
C08G25	C08G25I	25	2.65		

10 X 38



Catalog Number Without Indicator	Catalog Number With Indicator	Amp Rating	Watts Loss (W)	Voltage (AC)	Interrupting Rating (kA)
C10G0.5	C10G0.5I	0.5	1.43	500	120
C10G1	C10G1I	1	2.77		
C10G2	C10G2I	2	0.60		
C10G4	C10G4I	4	0.70		
C10G6	C10G6I	6	0.85		
C10G8	C10G8I	8	0.75		
C10G10	C10G10I	10	1.00		
C10G12	C10G12I	12	1.30		
C10G16	C10G16I	16	1.60		
C10G20	C10G20I	20	2.00		
C10G25	C10G25I	25	2.60		
C10G32	C10G32I	32	2.90		

14 X 51




Catalog Number Without Indicator	Catalog Number With Indicator	Amp Rating	Watts Loss (W)	Voltage (AC)	Interrupting Rating (kA)		
C14G1	C14G1I	1	3.90	690	80		
C14G2	C14G2I	2	0.90				
C14G4	C14G4I	4	1.00				
C14G6	C14G6I	6	1.15				
C14G8	C14G8I	8	1.00				
C14G10	C14G10I	10	1.30				
C14G12	C14G12I	12	1.70				
C14G16	C14G16I	16	2.00				
C14G20	C14G20I	20	2.50				
C14G25	C14G25I	25	3.30				
C14G32	C14G32I	32	3.50				
C14G40	C14G40I	40	4.85			500	500
C14G50	C14G50I	50	4.90			400	


22 X 58



Catalog Number Without Indicator	Catalog Number With Indicator	Amp Rating	Watts Loss (W)	Voltage (AC)	Interrupting Rating (kA)
C22G2	C22G2I	2	1.00	690	690
C22G4	C22G4I	4	1.10		
C22G6	C22G6I	6	1.30		
C22G8	C22G8I	8	1.10		
C22G10	C22G10I	10	1.50		
C22G12	C22G12I	12	1.80		
C22G16	C22G16I	16	2.10		
C22G20	C22G20I	20	2.70		
C22G25	C22G25I	25	3.60		
C22G32	C22G32I	32	3.70		
C22G40	C22G40I	40	4.50		
C22G50	C22G50I	50	5.20		
C22G63	C22G63I	63	6.90		
C22G80	C22G80I	80	7.80		
C22G100	C22G100I	100	8.60	500	500
C22G125	C22G125I	125	11.40	400	

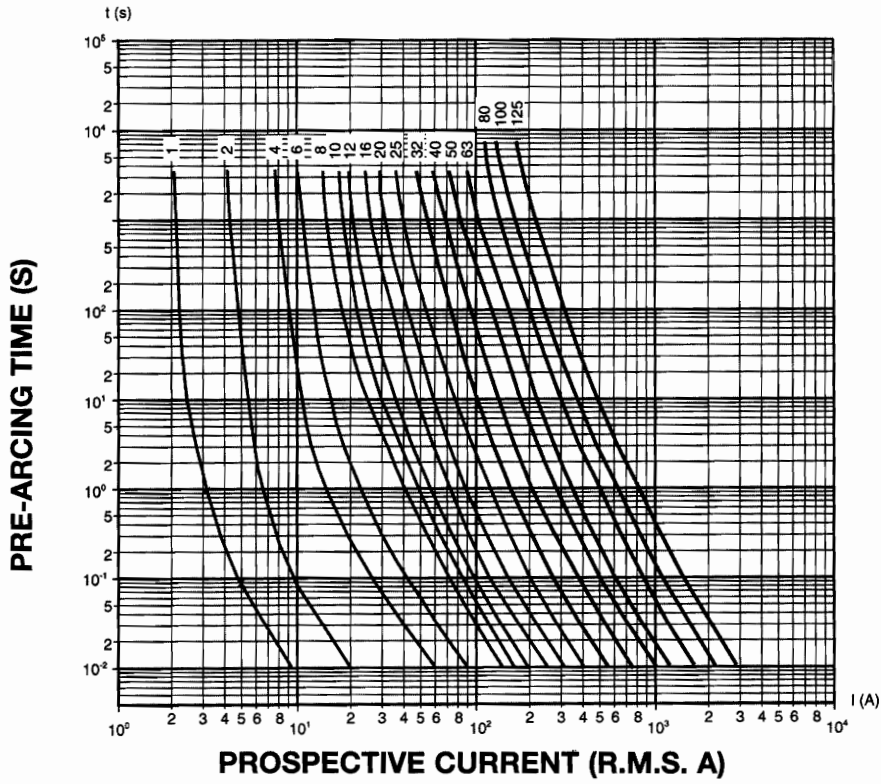

Cut-off Characteristics

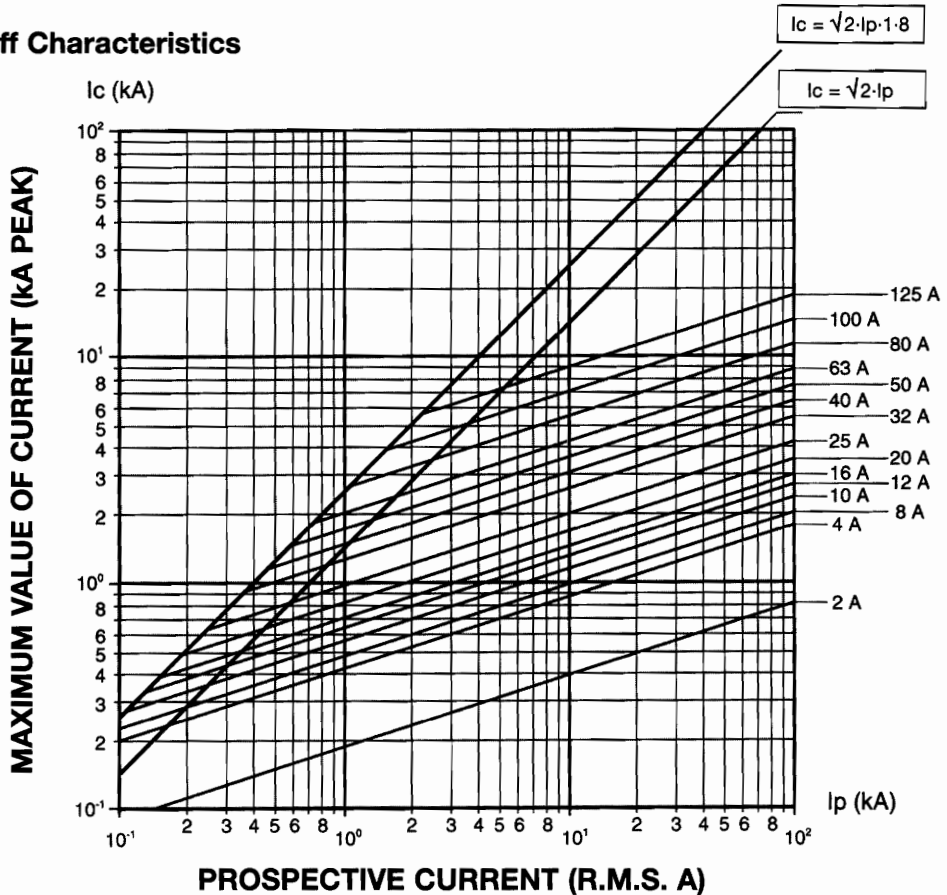

### Time Current Characteristics

